

Riithappu

03052
04608
04609

OPERATION

MANUAL

SLIDE

CARNYTOWN.COM



MAN-CO MFG., INC.

2470 Ewald Ave. S.E.
P.O. Box 13114
Salem, Or 97302
(503) 362-2347

INSPECTION REPORT CHECK LIST

MFG: MANCO PRODUCTS, INC.
NAME: SLIDE
TYPE: ATTRACTION

SLIDE _____ DWG. NO. SL-505S DATE _____

RIDE SERIAL NO. _____ OWNER _____

1. Check blocking on front and rear landing gear jacks and front outriggers and screw jacks.
2. Check leveling.
3. Inspect condition of aluminum step handrail.
4. Inspect condition of aluminum steps (cracks or missing steps.)
5. Check condition of steps on upper main frame.
6. Check condition of folding handrail on upper main frame.
7. Check condition of sliding surface for cracks and heel marks.
8. Check out electric heating on slide surface.
9. Inspect condition of safety carpet.
10. Check pins and snap keys in upper support arms.
11. Check condition of upper support arms and turnbuckles.
12. Check upper starting gates and loading steps. (Caution: Each starting gate must be secured in place with two (2) snap keys.)
13. Check condition of upper platform fence and snap keys.


14. Check condition of canopy.
15. Check sign for missing lights and for correct size bolts and nuts. (3/4" x 7" Grade 5)
16. Check condition of winches and correct cable size (3/16).
17. Check condition of outside fence and fence jacks. (Check proper method of assembly of outside fence.)
18. Check condition of upper platform support plywood floor. (Note: not all rides are equipped with plywood floor.)
19. Inspect for proper installation and condition of plastic bubble lights and plugs.
20. Check oil cylinder and oil tank for oil leaks.
21. Check all electric wire, main switch box, plugs and plug-in boxes.
22. Check all necessary pins for snap keys.
23. Check for correct power hookup (220 volt single phase with ground).
24. Inspect ride for overall appearance.
25. Inspect condition of sliding surface. (Note: wax or polishes are not recommended for sliding surface. Spray-on silicone is recommended.)
26. Check out ride operator for correct sliding instructions.

27. This ride requires two operators for a safe operation. (Note: one man on the top platform and one man at the bottom to regulate traffic.)

Inspector

REMARKS:

CARNY TOWN.COM

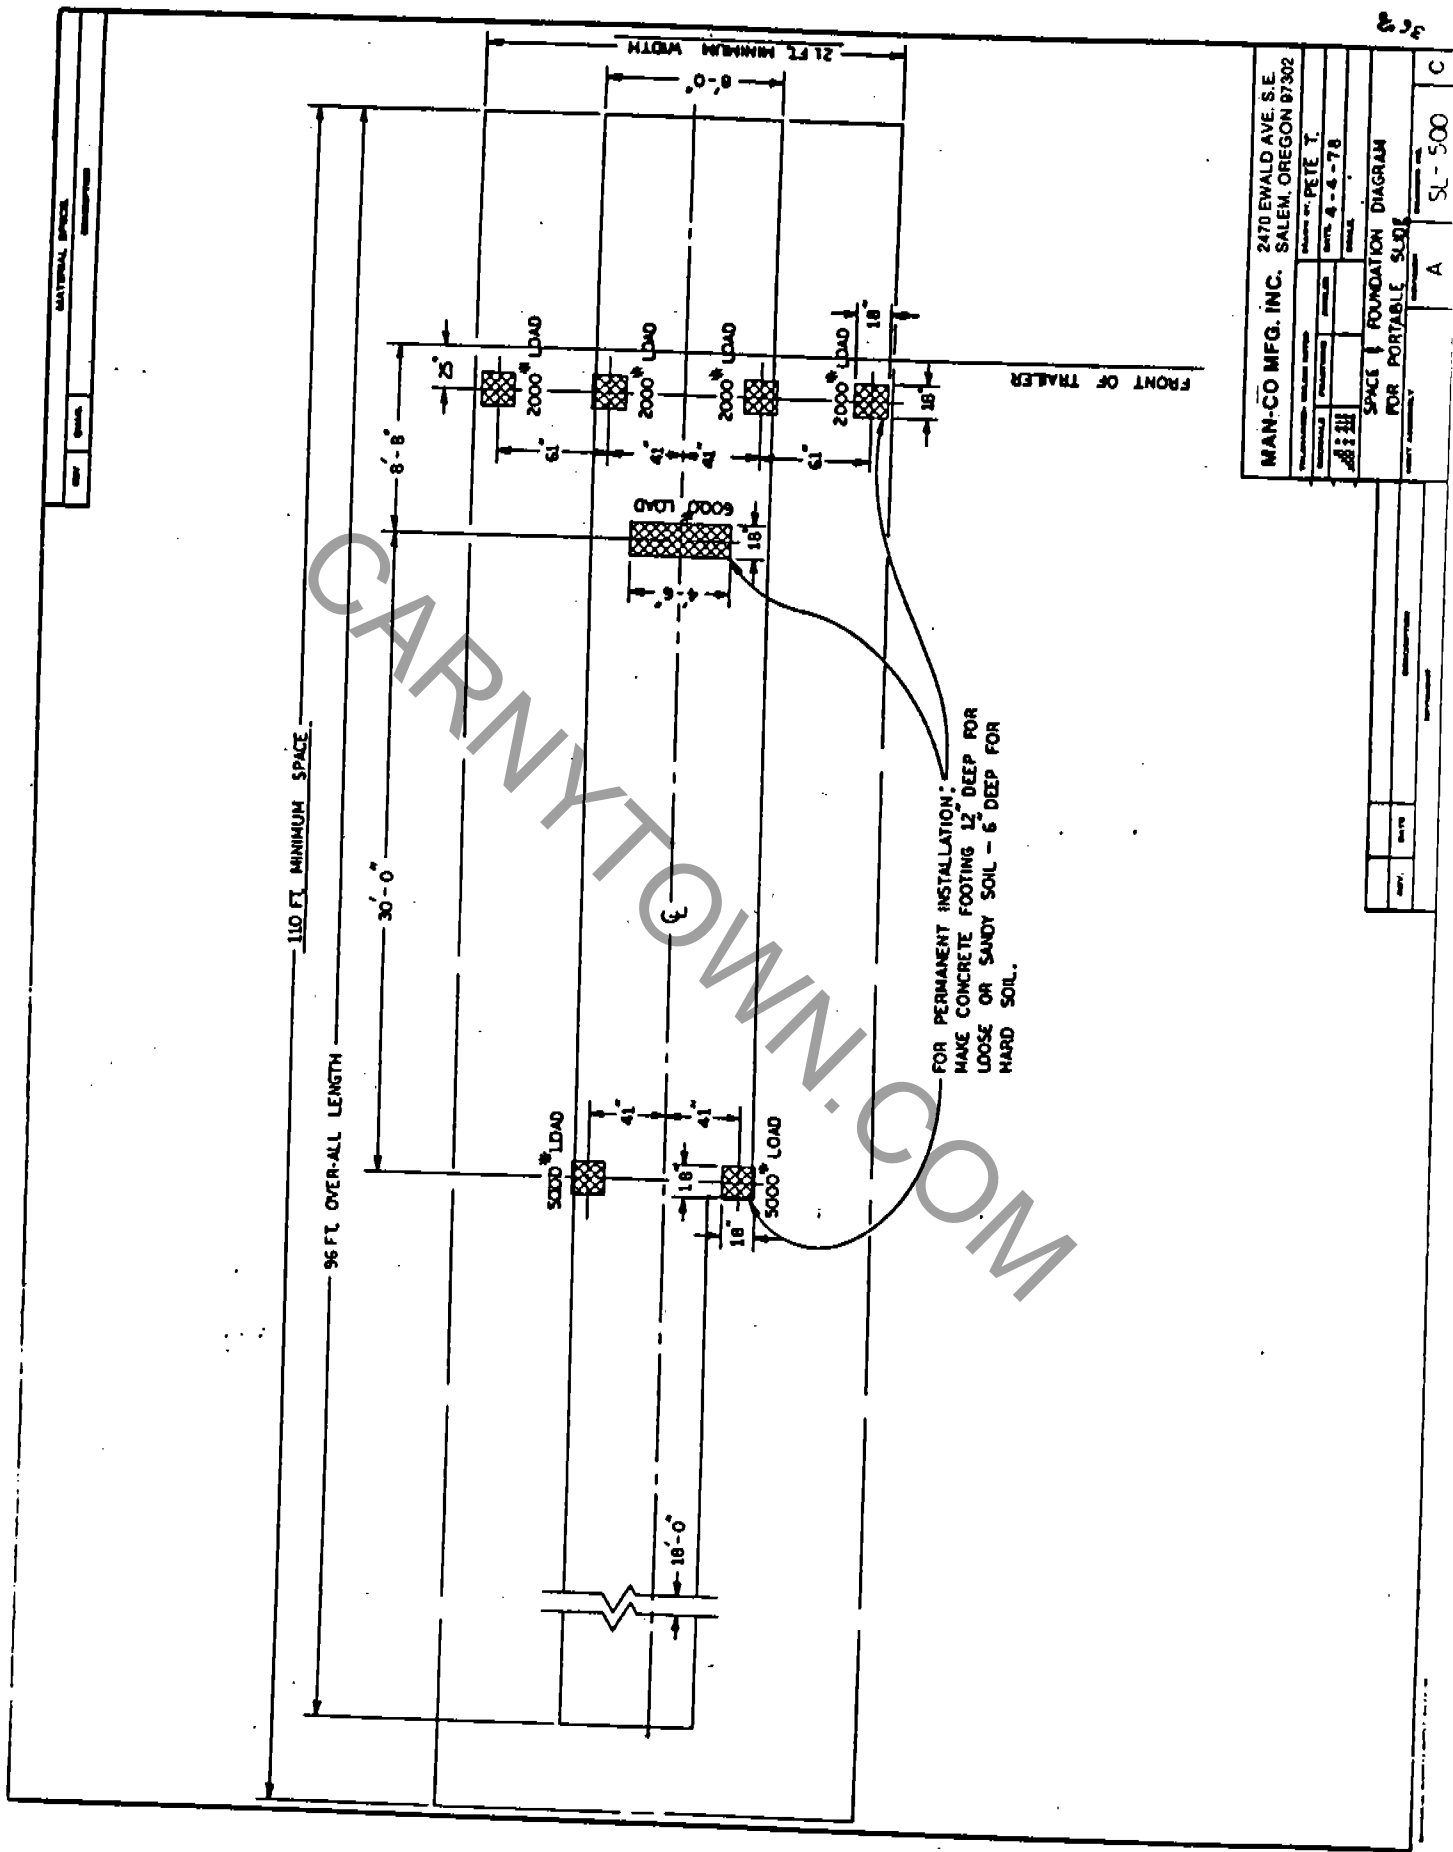

MATERIAL SPEC.

MAN-CO MFG. INC. 2470 EWALD AVE. S.E. SALEM, OREGON 97302

DESIGNED BY: PETE T.

DATE: 4-4-78

SCALE:

SPACE FOUNDATION DIAGRAM FOR PORTABLE SUB


PROJECT NO.:

REV. DATE:

A SL-500 C

CARNY TOWN.COM

MATERIAL SPEC.	
REV.	QUAN.

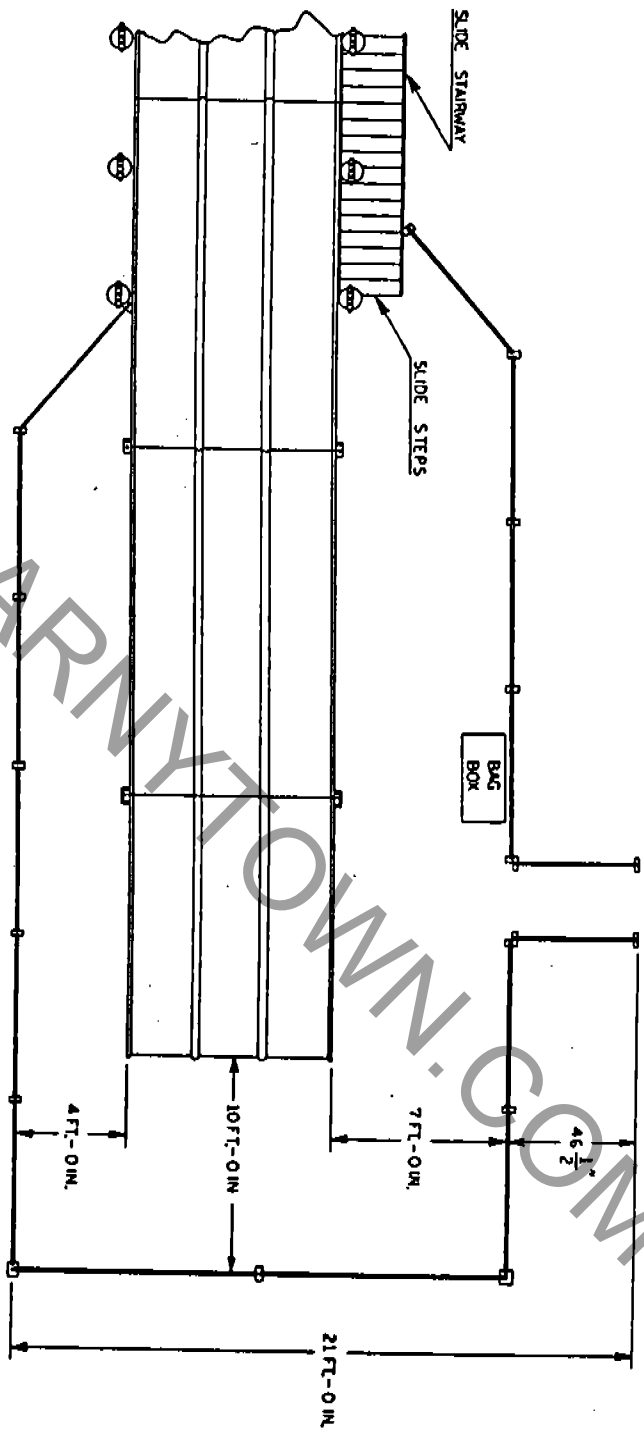

SUGGESTED FENCE LAYOUT PLAN

MAN-CO MFG. INC.		2470 EWALD AVE. S.E.	
		SALEM, OREGON 97302	
Product Name	Material	Quantity	Notes
FENCE LAYOUT DIAGRAM			
REV.	QUAN.	DESCRIPTION	
A		SL-50	C