

MFG: SPEED KING  
NAME: SPEED KING WATERSLI  
WATERSLIDE  
Type: NON-KID'S

RECEIVED  
JUL 14 1988  
DEPT. OF AGRICULTURE  
AGRICULTURE FAIRS

SPEED KING'S WATERSLIDE  
OPERATIONS MANUAL  
FOR  
Speed King Series Slides

CARNY TOWN.COM

1988



## SPEED KING SLIDE AND COMPONENTS

### SLIDE:

#### General Care:

The gel-coat finish on your fiberglass slide scratches very easily and therefore the finish needs to be treated like your automobile finish. A good coat of paste wax applied upon completion and then twice yearly thereafter should keep it in good condition. If attendants enforce "Instructions for Riding the Slide" that will protect the finish of your slide.

### SPLASH SHIELDS:

#### Placement:

Splash shields on the waterslide should be placed so the retention of water is obtained.

### STEEL UNDER STRUCTURE: (if applicable)

Steel is coated with an industrial metal paint. Touch-up provided. Should be repainted when necessary. The bolts should be checked monthly while in operation for loosening.

### PUMP:

There is an owners manual that accompanies all pumps.

### END OF YEAR MAINTENANCE:

Winterize all the plumbing pipes with recreational type anti-freeze.

The fiberglass needs no winterizing except a good coat of paste wax applied.

If you have any questions call manufacturer.

Speed King Co. 5401 E. University Des Moines, Iowa 50317  
515-265-4904

## INSTRUCTIONS FOR RIDING THE SLIDE

### FINISH:

The finish on the inside of your slide is Neoprene Gel Coat. It is the highest quality Gel-Coat available on the market. However, you must treat it like the finish on your automobile. Allow NO metal objects on the clothing of the rider that will scratch the finish. (example: Do not allow cut-offs with metal rivots at pockets, or life jackets with metal buckles.)

### RIDING POSITIONS:

The rider must be laying down feet first while descending the slide. The first slider must have exited the slide exit before the next slider is dispatched.

### LIFE GUARDS POSITION:

The life guards position must be one lifeguard at the top entry and one lifeguard positioned within at least 10 feet from where the slider enters the water.

### WEARING APPARELL:

The rider must not be allowed to wear cut-offs. The denim will not slide on the finish of the slide. No riding the slide with shoes on or clothing such as long pants. No belts, bracelets or hats allowed to be worn while sliding. If you want to permit only eyeglasses with back straps, that is your option. Broken glass in the pool will mean down time. No pets allowed down the slide.

## RULE-SIGNAGE

1. Ride down the slide laying down-feet first only.
2. No running permitted.
3. No trains of any length.
4. No diving into splash pool.
5. Keep hands inside flume at all times.
6. Never use the slide while under the influence of alcohol or drugs.
7. Exit the splash pool immediately.
8. No swimming in splash down pool.
9. No glasses or bottles allowed on the slide or in the pool area.
10. We are not responsible for any lost or stolen articles.
11. No jewelry, eyeglasses (except with a headstrap), belts, or hats permitted for your own protection.
12. Do not ride this slide if you are pregnant or have physical impairments.
13. No stopping, kneeling or standing in the flume.
14. No cut offs may be worn on this slide.
15. Obey attendants at all times.
16. Report any accident immediately.
17. This slide is safe but sliding may be dangerous. Slide at your own risk. We are not responsible for accidents.
18. Beginners ask attendants for instructions.

### SUGGESTED SIGN LOCATIONS

Pool-splash down rules. (example #7 & 15 above)  
Entry-Full instructions on slide use and restrictions.  
Walkway-Warnings or precautions (example #2 & 11 above)  
Tickets-General instructions and all rules.

### KEY POINTS ABOUT SIGNS

Colorful signs get attention immediately:

Yellow is caution--red is warning.

Sample of yellow sign..No running..Slippery when wet.

Sample of red sign..Pool Water 3 ft.

Easily read..Use symbols for non-english speaking persons

Elements to a good sign:

1. Signal word
2. Pictorial
3. Message

Rule of thumb for size. 35' to 40' of viewing distance per inch of height of letters.

We feel this is a minimum list of rules for signs. Modify for your installation.

#####

### ACCIDENTS

What are the major causes? What hazards might exist at your slide? Will you be found to be negligent?

Here are some of the leading causes of accidents and methods of prevention.

Collision in the splash pool remains the major cause of injuries. Therefor only one person will be allowed in the slide at one time. Another slider cannot enter down the slide until the first person has exited the slide. The attendant at the top of the flume will have to properly control the flow of customers. The attendant at the top of the flume should also instruct new riders as to the proper sliding position.

Cut hands from grabbing the edge of the fiberglass flume. Severe injuries with permanent disability occurs. Any exposed edges must be protected with vinyl edge trim. The most permanent way to install this vinyl trim is to rivot it into place.

Standing, kneeling and stopping in the flume must be strictly disciplined. Top attendants must not allow a running start. If the entire slide is not in view extreme caution must be made to watch the splash down pool for clearance. Pool attendants should watch for riders who slow down in the the flume.

Inadequate rules posted. If your rules are not comprehensive, you stand a lesser chance of defending a nuisance lawsuit. Posted rules give you the base to enforce them. You owe it to the public to tell them what behavior is dangerous. Certain rules such as "Do not slide if you have a physical impairment or are pregnant" are obvious to us, but may not be obvious to the general public.

Attendants out of position creates a potentially disastrous situation. Even if there are only a few persons on the slide, lack of a top attendant invites chaining and horseplay. Lack of a bottom attendant may result in a drowning if a rider should get cramps or lose conciousness. MOST IMPORTANT!!

Slips and falls are other common injuries that can be severe. Sidewalks, and pool bottoms should be covered with a non-slip coating such as sand in the paint. Algae must be kept off the carpeting. Hand rails are necessary in the splash pool and are helpful on sidewalks. A surprising number of operators are unconcerned about kids running on sidewalks, so unnecessary injuries result.

Hire good, attentive attendants, train them well, enforce the rules, repair any hazards and you will have done your part in preventing potentially serious injuries.

## LIFESAVING EQUIPMENT-MINIMUM REQUIREMENTS

NOTE: Each state has different requirements for equipment for splash pools of water 36" to 42" in depth. The following lifesaving equipment list is only a suggested list if none is given by your state. It shall be on hand at all times and available for use as identified.

### EQUIPMENT SPECIFICATIONS

- Reach Pole To be a minimum of eight (8) feet in length. Can be aluminum construction with rubber tips permanently affixed to both ends. Can be made from 1 1/2" P.V.C. pipe and glue cap ends to each end.
- Rescue Cannister Check with your state requirements for splash pools of three (3) feet in depth.
- Ring-Buoy Construction to be of soft material, minimum diameter 18", maximum diameter 30", with throwing rope, minimum length 40', maximum length 60'.

### MINIMUM RECOMMENDED TRAINING FOR POOL GUARDS/ATTENDANTS

#### LIFEGUARD/POOL ATTENDANT

Roving lifeguard stations at locations where water depth is less than four feet.

#### In-service training program:

##### Purpose

The purpose of the program is to instill a feeling of professionalism, pride and superiority in the Guard staff and furthermore, structure a situation whereby our customers and others in the field of aquatic safety perceive them as superior to other guards.

### Program Objective

Decrease by 50% the likelihood of a guest accident resulting in the loss of life due to a drowning by maintaining a guard staff that is:

1. Physically fit
2. Highly competent
3. Strong swimmers
4. At or above the 90th percentile of "pool guards" in their lifesaving skills.
5. Professional in their appearance, both on and off their duty station.

### Program Implementation

#### A. Recruiting/Pre-employment

1. Selection not only based upon personality, experience and requirements, but also on a pre-employment skills test which reflects swimming ability and lifesaving skills.
2. Incumbent Staff - notified early in the spring of the certification test or what skills are required of them before employment commences in order to retain their position at our park.
3. Staff selected from top of those interviewed and tested.

#### B. Orientation

Orientation testing shall be the test approved by management or governed by your state. Additional testing and practice may be included at the discretion of management.

#### C. In Service Meetings

1. Conducted on a bi-weekly basis at minimum
2. Agenda shall be prepared and/or pre-operatively approved by management.
3. At a minimum, the following shall be included in the agenda at the reflected intervals:

- a. A discussion of any mishap within the industry to include a critique of same, as appropriate.
- b. Viewing of audio/visual presentations which address the prevention of drowning at least twice per season.

CARNYTOWN.COM

ATTENDANTS STAFFING  
SAFETY STANDARDS  
Pre-work Assignment

POSITIONS--SLIDE ATTENDANTS & POOL ATTENDANTS

1. An attendant will be positioned at the top of each flume while the slide is in operation.
2. An attendant will be positioned at the splash down pool while slide is in operation.

I understand that I will not be held accountable for an accident in my capacity as a lifeguard/attendant if I do the following:

- \*a. I am at my duty station as assigned and never leave until I am either relieved or ride/pool is closed.
- \*b. I can identify sliders in my area that are most likely to need assistance.
- \*c. I provide assistance to anyone who is obviously having trouble or is under the water for more than 30 seconds.
- \*d. When on duty at the splash pool, I will take all necessary actions to clear the landing areas to prevent riders from colliding.
- \*e. When on duty at the top of the slides, I will wait until the previous rider has exited the slide before dispatching the next rider. I visually scan the slide channels at all times.
- \*f. At any time I observe a situation or condition which in my opinion is a safety hazard, I shall notify my supervisor or if in the case of an emergency close ride immediately.
- \*g. At any time I observe a small child without a lifevest, I advise him/her or his/her parent that free lifevests are available, they are required, and where one can be secured.

\*THE ABOVE STANDARDS ARE THOSE THAT CAN PREVENT AN ACCIDENT WHICH COULD RESULT IN LOSS OF LIFE, LIMB, SIGHT OR PARALYSIS, (ie.,drowning). I AM RESPONSIBLE FOR COMMITTING THESE SAFETY

STANDARDS TO MEMORY.

NOTE A "safety hazard" is any situation or condition, outside of the design and nature of the ride itself, which may result in the loss of life, limb, sight or paralysis.

- h. I do not allow sliders to dive into the splash down pool.
- i. I do not allow guests and/or employees to run anywhere on our property.
- j. I do not allow guests to engage in rough and/or rowdy "horseplay".
- k. I do not allow any glass containers within the park.
- l. I insure that the lifesaving equipment assigned to my station is on hand at all times when I am at my duty station.
- m. I do not allow anyone who has not been approved by management as an operator or an attendant to relieve my duty station or act as an attendant while I am assigned to my duty station.
- n. My performance and the manner in which I do my job reflects that my primary responsibility is to prevent accidents, both in the water and on the immediate deck area, and my secondary responsibility is the rescue and emergency care of accident victims.
- o. I enforce the rules as posted and only allow guests to ride in the approved manner/positions for the respective channel.
- p. I allow only one person to ride at a time.

I have reviewed the aforementioned standards on or before: \_\_\_\_\_  
Date

\_\_\_\_\_  
Employee

## SAFETY STANDARDS

### POSITION-Manager

The manager will not be held accountable for an accident if he/she does the following:

1. Insures that, because the safety and welfare of the guests and employees is the highest priority, the safety program in its entirety, shall be strictly adhered to. He/she shall insure that the appropriate scheduling is done to properly conduct safety meetings with all employees on a regular basis.
2. The manager will inspect and tour and monitor the condition of the park as it pertains to safety.
3. The manager will inspect and walk the slide twice daily checking for any irregularities.
4. Interview a minimum of 3 hourly employees, at least 1 to be from each area, in order to assess the awareness of the parks Safety Standards and Emergency Procedures.
5. Monthly, each month the park is open to the public, review the implementation of this procedure with the Management to insure compliance.

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

## EMERGENCY PROCEDURES

Management must set down a set of rules for the employees to follow under emergencies such as loss of electric, a lightning storm approaching, a serious accident, a defect in a part of the operational equipment during operational hours.

These rules should be included with each employee hand out upon employment and then posted in employee areas for review periodically.

A list of emergency phone numbers should be placed by the phone for emergency use.

First aid supplies should be kept in a very accessible place. Any accident that is serious enough for any kind of medical attention is considered serious enough to report on an accident reporting form. Consult your insurance carrier for specific accident reporting procedures.


Your local health department, either state or city, may require you to keep some records. This information will have to be obtained from that authority.

## SLIDE MAINTENANCE and REPAIR SUGGESTIONS

Manager or an assigned person should walk the slide twice daily and check for any chips or irregularities in the fiberglass. Should any irregularities appear that maintenance is unable to repair you should contact the manufacturer for directions. The under structure should be checked monthly during the operating season for bolts that may have loosened.

The slide surface should have a good coat of paste wax applied before initial operation and then waxed twice yearly thereafter.

The understructure should be repainted with a good quality paint when necessary.

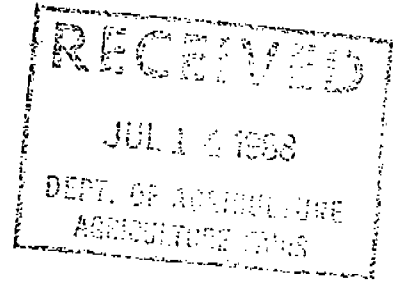

AQUA WORLD'S WATERSLIDE  
OPERATIONS MANUAL  
FOR  
AQUA WORLD SERIES SLIDES

1988

CARNYTOWN.COM

- design
- construction
- manufacture
- consultation

**AQUA  
WORLD**

## AQUA WORLD SLIDE AND COMPONENTS

### SLIDE:

#### General Care:

The gel-coat finish on your fiberglass slide scratches very easily and therefore the finish needs to be treated like your automobile finish. A good coat of paste wax applied upon completion and then twice yearly thereafter should keep it in good condition. If attendants enforce "Instructions for Riding the Slide" that will protect the finish of your slide.

### SPLASH SHIELDS:

#### Placement:

Splash shields on the waterslide should be placed so the retention of water is obtained.

### STEEL UNDER STRUCTURE: (if applicable)

Steel is coated with Rustoleum paint. Touch-up provided. Should be repainted when necessary. The bolts should be checked monthly while in operation for loosening.

### WOOD UNDER STRUCTURE: (if applicable)

Wood should be checked for deterioration before start up in the spring. If wood understructure is painted it should be repainted when necessary. The bolts should be checked monthly while in operation for loosening.

PUMP:

There is an owners manual that accompanies all pumps.

END OF YEAR MAINTENANCE:

Winterize all the plumbing pipes with recreational type anti-freeze.

The fiberglass needs no winterizing except a good coat of paste wax applied.

If you have any questions call manufacturer.

Aqua World Mfg. Co.  
5401 E. University Ave.  
Des Moines, Iowa 50317  
(515)-265-4904.

## INSTRUCTIONS FOR RIDING THE SLIDE

### FINISH:

The finish on the inside of your slide is Neopyrene Gel Coat. It is the highest quality Gel-Coat available on the market. However, you must treat it like the finish on your automobile. Allow NO metal objects on the clothing of the rider that will scratch the finish. (example: Do not allow cut-offs with metal rivots at pockets, or life jackets with metal buckles.)

### RIDING POSITIONS:

The rider must be sitting down or laying down feet first while descending the slide. The first slider must have exited the flag area before the next slider is dispatched.

### WEARING APPARELL:

The rider must not be allowed to wear cut-offs. The denim will not slide on the finish of the slide. No riding the slide with shoes on or clothing such as long pants. No belts, bracelets or hats allowed to be worn while sliding. If you want to permit only eyeglasses with back straps, that is your option. Broken glass in the pool will mean down time. No pets allowed down the slide.

## RULE-SIGNAGE

1. Ride down the slide laying down, or sitting upright.
2. No running permitted.
3. No trains of any length.
4. No diving into splash pool.
5. Keep hands inside flume at all times.
6. Never use the slide while under the influence of alcohol or drugs.
7. Exit the splash pool immediately.
8. No swimming in splash down pool.
9. No glasses or bottles allowed on the slide or in the pool area.
10. We are not responsible for any lost or stolen articles.
11. No jewelry, eyeglasses (except with a headstrap), belts, or hats permitted for your own protection.
12. Do not ride this slide if you are pregnant or have physical impairments.
13. No stopping, kneeling or standing in the flume.
14. No cut offs may be worn on this slide.
15. Obey attendants at all times.
16. Report any accident immediately.
17. This slide is safe but sliding may be dangerous. Slide at your own risk. We are not responsible for accidents.
18. Beginners ask attendants for instructions.

### SUGGESTED SIGN LOCATIONS

Pool-splash down rules. (example #7 & 15 above)

Entry-Full instructions on slide use and restrictions.

Walkway-Warnings or precautions (example #2 & 11 above)

Tickets-General instructions and all rules.

## KEY POINTS ABOUT SIGNS

Colorful signs get attention immediately:

Yellow is caution--red is warning.

Sample of yellow sign..No running..Slippery when wet.

Sample of red sign..Pool Water 3 ft.

Easily read..Use symbols for non-english speaking persons

Elements to a good sign:

1. Signal word
2. Pictorial
3. Message

Rule of thumb for size. 35' to 40' of viewing distance per inch of height of letters.

We feel this is a minimum list of rules for signs. Modify for your installation.

#####

### ACCIDENTS

What are the major causes? What hazards might exist at your slide? Will you be found to be negligent?

Here are some of the leading causes of accidents and methods of prevention.

Collision in the splash pool remains the major cause of injuries. Another slider cannot enter down the slide until the first person has passed the flag area of the slide. The attendant at the top of the flume will have to properly control the flow of customers. It depends on the weight of a person as to the speed he will slide. The owner should do some experimenting with his own slide to learn how the different weights and how the different materials of clothing will ride differently on the slide. Then the owner will convey this information in a staff training session. The attendant at the top of the flume should also instruct new riders as to the proper sliding position.

Cut hands from grabbing the edge of the fiberglass flume. Severe injuries with permanent disability occurs. Any exposed edges must be protected with vinyl edge trim. The most permanent way to install this vinyl trim is to rivot it into place.

Standing, kneeling and stopping in the flume must be strictly disciplined. Top attendants must not allow a running start. If the entire slide is not in view extreme caution must be made to watch the splash down pool for clearance. Pool attendants should watch for riders who slow down in the the flume.

Inadequate rules posted. If your rules are not comprehensive, you stand a lesser chance of defending a nuisance lawsuit. Posted rules give you the base to enforce them. You owe it to the public to tell them what behavior is dangerous. Certain rules such as "Do not slide if you have a physical impairment or are pregnant" are obvious to us, but may not be obvious to the general public.

Attendants out of position creates a potentially disastrous situation. Even if there are only a few persons on the slide, lack of a top attendant invites chaining and horseplay. Lack of a bottom attendant may result in a drowning if a rider should get cramps or lose conciousness. MOST IMPORTANT!!

Slips and falls are other common injuries that can be severe. Sidewalks, and pool bottoms should be covered with a non-slip coating such as sand in the paint. Algae must be kept off the carpeting. Hand rails are necessary in the splash pool and are helpful on sidewalks. A surprising number of operators are unconcerned about kids running on sidewalks, so unnecessary injuries result.

Hire good, attentive attendants, train them well, enforce the rules, repair any hazards and you will have done your part in preventing potentially serious injuries.

## LIFESAVING EQUIPMENT-MINIMUM REQUIREMENTS

NOTE: Each state has different requirements for equipment for splash pools of water 36" to 42" in depth. The following lifesaving equipment list is only a suggested list if none is given by your state. It shall be on hand at all times and available for use as identified.

### EQUIPMENT SPECIFICATIONS

- Reach Pole To be a minimum of eight (8) feet in length. Can be aluminum construction with rubber tips permanently affixed to both ends. Can be made from 1 1/2" P.V.C. pipe and glue cap ends to each end.
- Rescue Cannister Check with your state requirements for splash pools of three (3) feet in depth.
- Ring-Buoy Construction to be of soft material, minimum diameter 18", maximum diameter 30", with throwing rope, minimum length 40', maximum length 60'.

### MINIMUM RECOMMENDED TRAINING FOR POOL GUARDS/ATTENDANTS

#### LIFEGUARD/POOL ATTENDANT

Roving lifeguard stations at locations where water depth is less than four feet.

#### In-service training program:

##### Purpose

The purpose of the program is to instill a feeling of professionalism, pride and superiority in the Guard staff and furthermore, structure a situation whereby our customers and others in the field of aquatic safety perceive them as superior to other guards.

### Program Objective

Decrease by 50% the likelihood of a guest accident resulting in the loss of life due to a drowning by maintaining a guard staff that is:

1. Physically fit
2. Highly competent
3. Strong swimmers
4. At or above the 90th percentile of "pool guards" in their lifesaving skills.
5. Professional in their appearance, both on and off their duty station.

### Program Implementation

#### A. Recruiting/Pre-employment

1. Selection not only based upon personality, experience and requirements, but also on a pre-employment skills test which reflects swimming ability and lifesaving skills.
2. Incumbent Staff - notified early in the spring of the certification test or what skills are required of them before employment commences in order to retain their position at our park.
3. Staff selected from top of those interviewed and tested.

#### B. Orientation

Orientation testing shall be the test approved by management or governed by your state. Additional testing and practice may be included at the discretion of management.

#### C. In Service Meetings

1. Conducted on a bi-weekly basis at minimum
2. Agenda shall be prepared and/or pre-operatively approved by management.
3. At a minimum, the following shall be included in the agenda at the reflected intervals:
  - a. A discussion of any mishap within the

industry to include a critique of same, as appropriate.

b. Viewing of audio/visual presentations which address the prevention of drowning at least twice per season.

CARNYTOWN.COM

ATTENDANTS STAFFING  
SAFETY STANDARDS  
Pre-work Assignment

POSITIONS--SLIDE ATTENDANTS & POOL ATTENDANTS

1. An attendant will be positioned at the top of each flume while the slide is in operation.
2. An attendant will be positioned at the splash down pool while slide is in operation.

I understand that I will not be held accountable for an accident in my capacity as a lifeguard/attendant if I do the following:

- \*a. I am at my duty station as assigned and never leave until I am either relieved or ride/pool is closed.
- \*b. I can identify sliders in my area that are most likely to need assistance.
- \*c. I provide assistance to anyone who is obviously having trouble or is under the water for more than 30 seconds.
- \*d. When on duty at the splash pool, I will take all necessary actions to clear the landing areas to prevent riders from colliding.
- \*e. When on duty at the top of the slides, I will wait until the previous rider has exited the slide before dispatching the next rider. I visually scan the slide channels at all times.
- \*f. At any time I observe a situation or condition which in my opinion is a safety hazard, I shall notify my supervisor or if in the case of an emergency close ride immediately.
- \*g. At any time I observe a small child without a lifevest, I advise him/her or his/her parent that free lifevests are available, they are required, and where one can be secured.

\*THE ABOVE STANDARDS ARE THOSE THAT CAN PREVENT AN ACCIDENT WHICH COULD RESULT IN LOSS OF LIFE, LIMB, SIGHT OR PARALYSIS, (ie.,drowning). I AM RESPONSIBLE FOR COMMITTING THESE SAFETY

STANDARDS TO MEMORY.

NOTE A "safety hazard" is any situation or condition, outside of the design and nature of the ride itself, which may result in the loss of life, limb, sight or paralysis.

- h. I do not allow sliders to dive into the splash down pool.
- i. I do not allow guests and/or employees to run anywhere on our property.
- j. I do not allow guests to engage in rough and/or rowdy "horseplay".
- k. I do not allow any glass containers within the park.
- l. I insure that the lifesaving equipment assigned to my station is on hand at all times when I am at my duty station.
- m. I do not allow anyone who has not been approved by management as an operator or an attendant to relieve my duty station or act as an attendant while I am assigned to my duty station.
- n. My performance and the manner in which I do my job reflects that my primary responsibility is to prevent accidents, both in the water and on the immediate deck area, and my secondary responsibility is the rescue and emergency care of accident victims.
- o. I enforce the rules as posted and only allow guests to ride in the approved manner/positions for the respective channel.
- p. I allow only one person to ride at a time.

I have reviewed the aforementioned standards on or before: \_\_\_\_\_

Date

\_\_\_\_\_  
Employee

## SAFETY STANDARDS

### POSITION-Manager

The manager will not be held accountable for an accident if he/she does the following:

1. Insures that, because the safety and welfare of the guests and employees is the highest priority, the safety program in its entirety, shall be strictly adhered to. He/she shall insure that the appropriate scheduling is done to properly conduct safety meetings with all employees on a regular basis.
2. The manager will inspect and tour and monitor the condition of the park as it pertains to safety.
3. The manager will inspect and walk the slide twice daily checking for any irregularities.
4. Interview a minimum of 3 hourly employees, at least 1 to be from each area, in order to assess the awareness of the parks Safety Standards and Emergency Procedures.
5. Monthly, each month the park is open to the public, review the implementation of this procedure with the Management to insure compliance.

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

## EMERGENCY PROCEDURES

Management must set down a set of rules for the employees to follow under emergencies such as loss of electric, a lightning storm approaching, a serious accident, a defect in a part of the operational equipment during operational hours.

These rules should be included with each employee hand out upon employment and then posted in employee areas for review periodically.

A list of emergency phone numbers should be placed by the phone for emergency use.

First aid supplies should be kept in a very accessible place. Any accident that is serious enough for any kind of medical attention is considered serious enough to report on an accident reporting form. Consult your insurance carrier for specific accident reporting procedures.

Your local health department, either state or city, may require you to keep some records. This information will have to be obtained from that authority.

## SLIDE MAINTENANCE and REPAIR SUGGESTIONS

Manager or an assigned person should walk the slide twice daily and check for any chips or irregularities in the fiberglass. Should any irregularities appear that maintenance is unable to repair you should contact the manufacturer for directions. The under structure should be checked monthly during the operating season for bolts that may have loosened.

The slide surface should have a good coat of paste wax applied before initial operation and then waxed twice yearly thereafter.

The understructure should be repainted with a good quality paint when necessary.

CARNYTOWN.COM

CARNYTOWN.COM