



MFG: ZAMPERLA
RIDE: SWING RIDE
KIDDIE SWING



ZAMPERLA

AMUSEMENT RIDES MANUFACTURERS

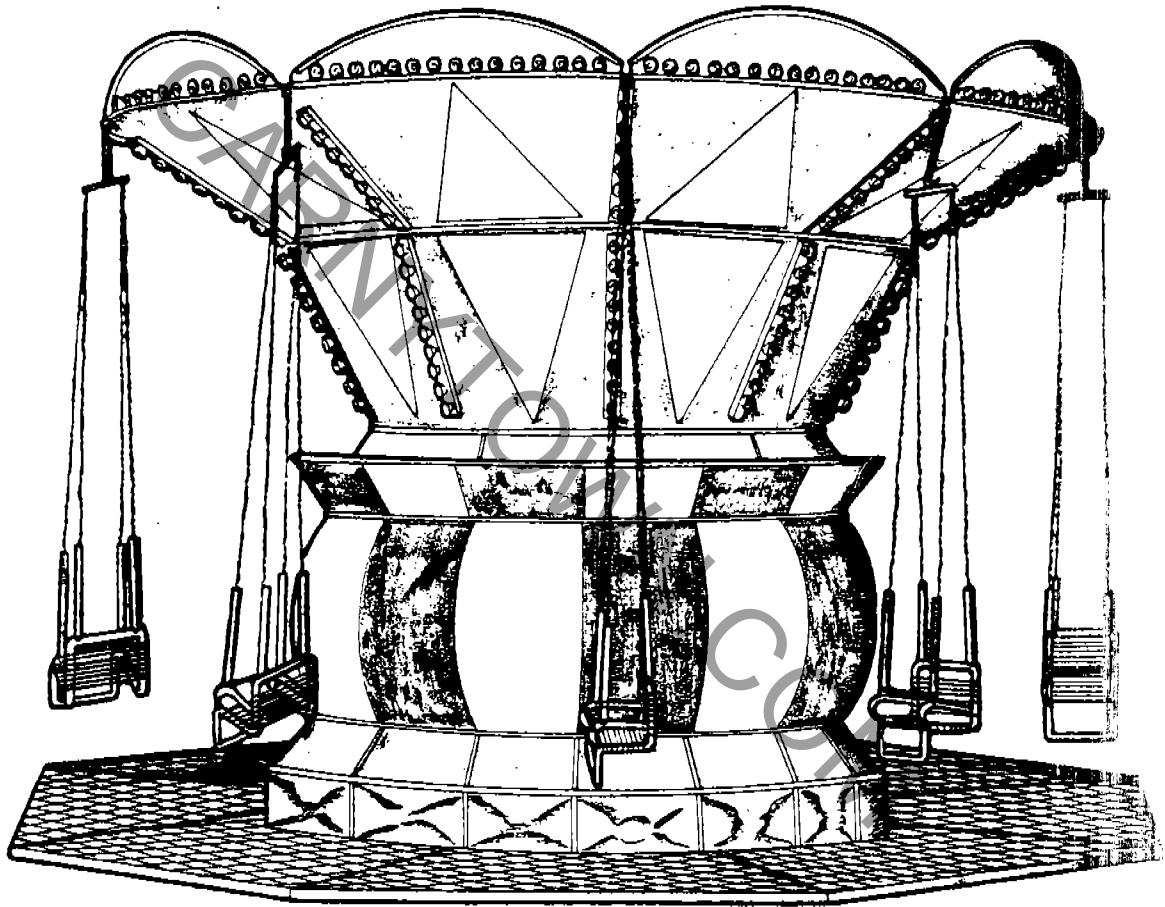

SWING RIDE

- SPARE PARTS CATALOGUE
 - CATALOGO RICAMBI
-

The descriptions and illustrations contained in the present publication are understood to be non-binding; ZAMPERLA INC. thus reserves the rights to effect, at any time and without prior commitment to bring the publication up-to-date, any such alterations to organs, component parts any accessory supplies as it may deem opportune for the purposes of improvement or in order to meet any demande of a constructional or commercial nature.

Le descrizioni ed illustrazioni contenute nella presente pubblicazione non s'intendono impegnative; la ZAMPERLA pertanto, si riserva il diritto di apportare in qualunque momento, senza impegnarsi ad aggiornare tempestivamente la pubblicazione, le eventuali modifiche ad organi, dettagli, forniture di accessori, che essa ritiene convenienti per un miglioramento o per qualsiasi esigenza di carattere costruttivo o commerciale.

ZAMPERLA INC.
AMUSEMENT RIDES MANUFACTURERS
U.S. OFFICE: 16 Rd. Brunswick N.J. 08816
ph. (201) 238-6280 - Tlx. 642286

A. ZAMPERLA S.r.l.
AMUSEMENT RIDES MANUFACTURES
Via Monte Grappa, 7
36100 ALTAVILLA VICENTINA - VI - ITALIA
Tel. 0444 / 573133 (6 linee ric. aut.)
Telex 431088 ZAMPER I

SPARE PARTS CATALOG

This catalogue illustrates and describes spare parts for product **ZAMPERLA**.

How to order spare parts

In order to facilitate stock search operations and shipment of spare parts we would ask our customers to observe the following standard procedures, specifying:

- a) Ride model
- b) Quantity of parts required
- c) Reference number, description, number of table in which parts are listed together.
- d) Exact address and company status of the purchaser, complete with relevant address for delivery of the goods.
- e) Shipment method required. (If this item is not specified, **ZAMPERLA** reserves the right, at its own discretion, to use any such method as it may deem opportune).

CATALOGO RICAMBI

Il presente catalogo, illustra e descrive le parti di ricambio relativo al prodotto **ZAMPERLA**.

Modalità di ordinazione


Per facilitare la ricerca di magazzino e la spedizione dei pezzi di ricambio si pregano vivamente i Sigg. Clienti di attenersi alle seguenti norme e specificare sempre:


- a) Modello della giostra
- b) Quantità e pezzi desiderati
- c) Numero di riferimento, denominazione, numero di tavola nella quale sono rappresentati
- d) Indirizzo esatto e ragione sociale del Committente; completato con l'eventuale recapito per la consegna della merce
- e) Mezzo di spedizione desiderato. (Nel caso questa voce non sia specificata, la Ditta **ZAMPERLA**, si riserva di usare a sua discrezione il mezzo più opportuno).


**SPARE PART LIST
LISTA RICAMBI**


POS.	DESCRIPTION	DESCRIZIONE
SR 101	- Emergency push-button	Pulsante emergenza
SR 101A	- Fruit	Frutto
SR 102	- Start push button	Pulsante start
SR 102A	- Fruit	Frutto
SR 103	- Alarm push button	Pulsante allarme
SR 103A	- Fruit	Frutto
SR 104	- Brush assembly	Spazzola completa
SR 105	- .Charcoal	.Carboncino
SR 106	- Electric commutator	Collettore elettrico
SR 107	- Trapezoidal belt	Cinghia trapezoidale
SR 108	- Driven pulley	Puleggia condotta
SR 109	- Motive pulley	Puleggia motrice
SR 110	- Reduction gear	Riduttore
SR 111	- Hydraulic joint	Giunto oleodinamico
*SR 112	- Unipolar automatic switch	Interruttore automatico unipolare
SR 113	- Motor protector	Salvamotore
*SR 114	- Differential general automatic switch	Interruttore automatico generale differenziale
SR 115	- Transformer (voltage specification)	Trasformatore (specificare tensione)

* = Specified amperage/Specificare amperaggio

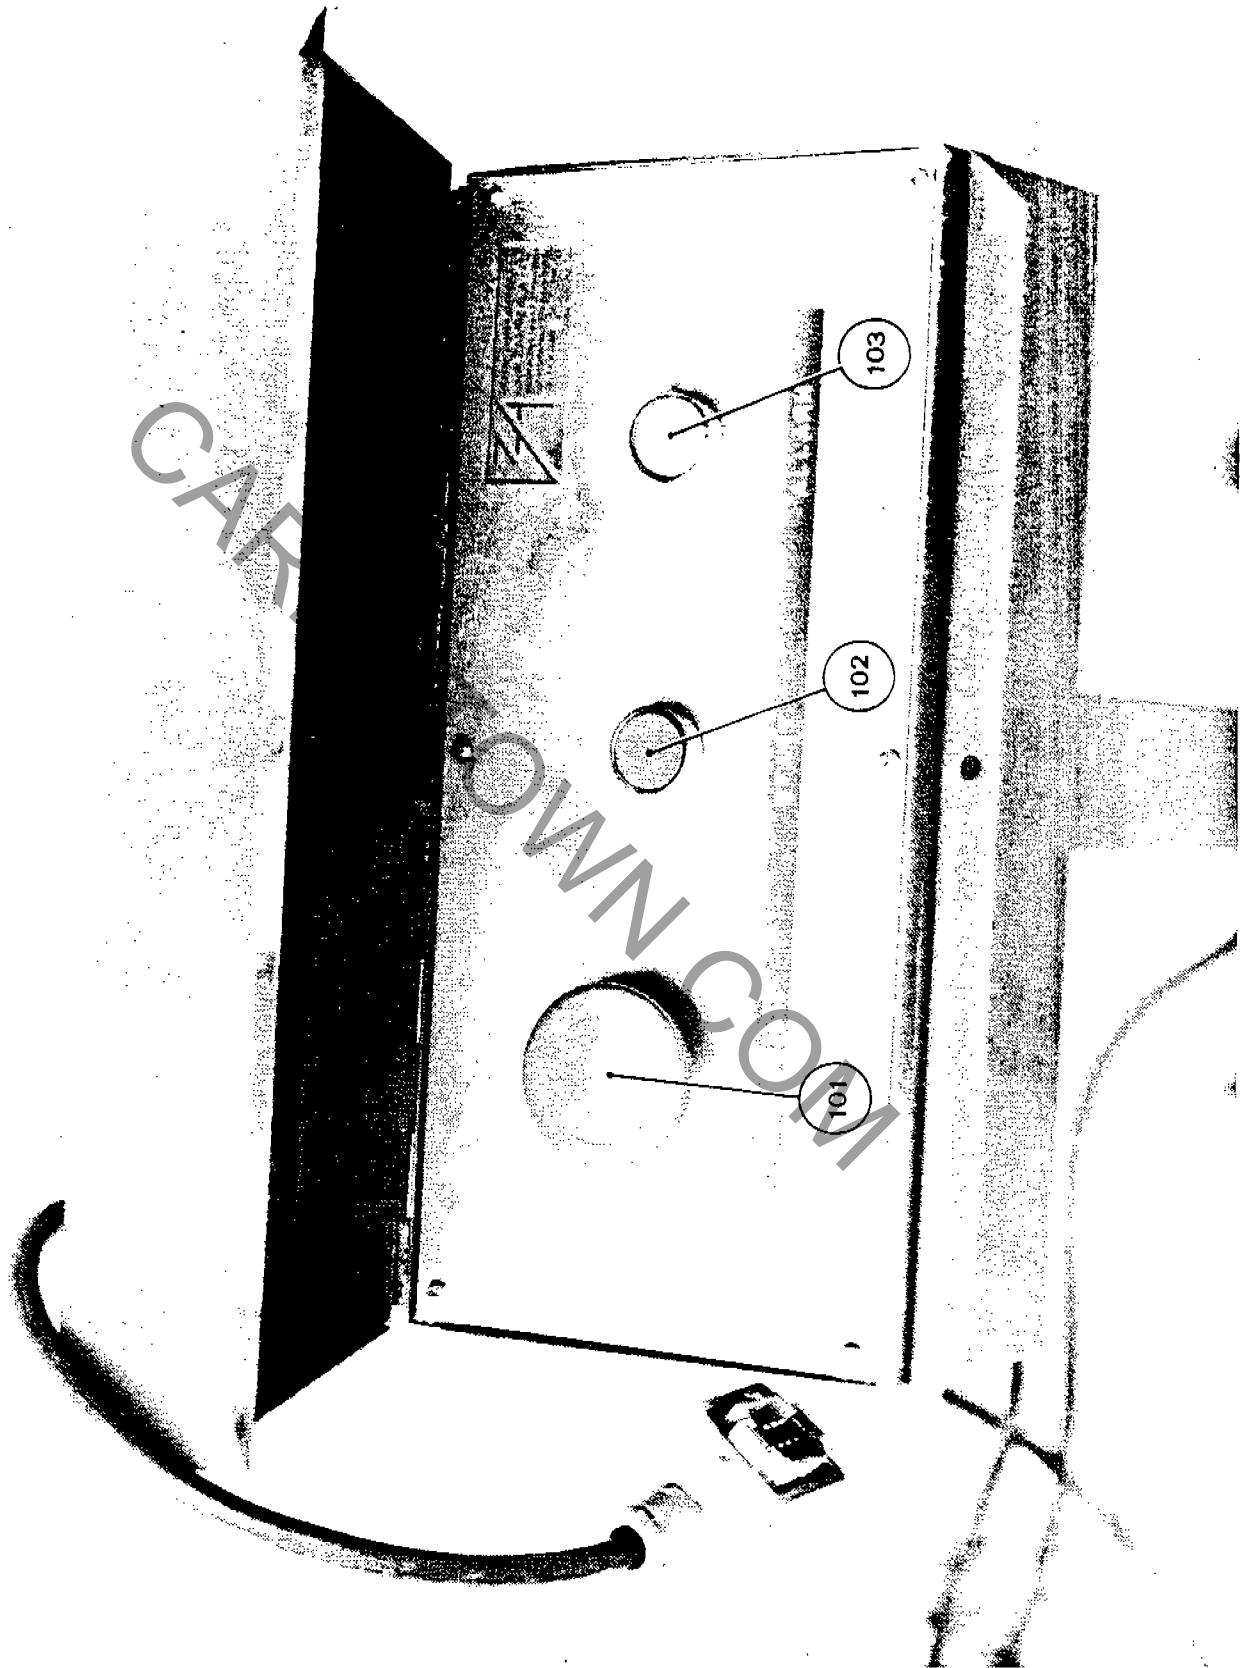

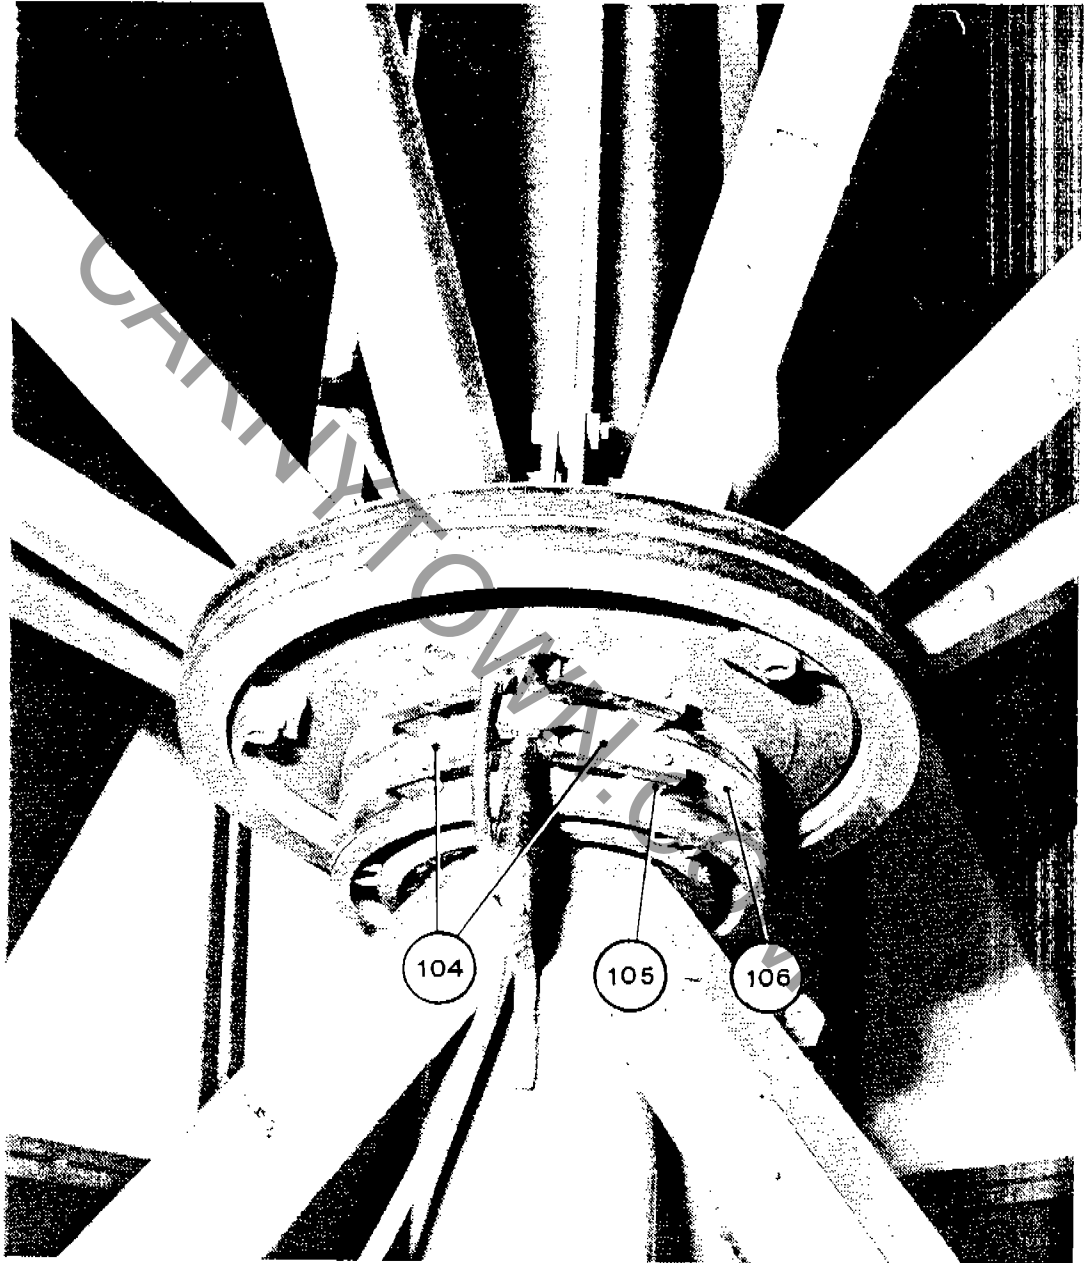

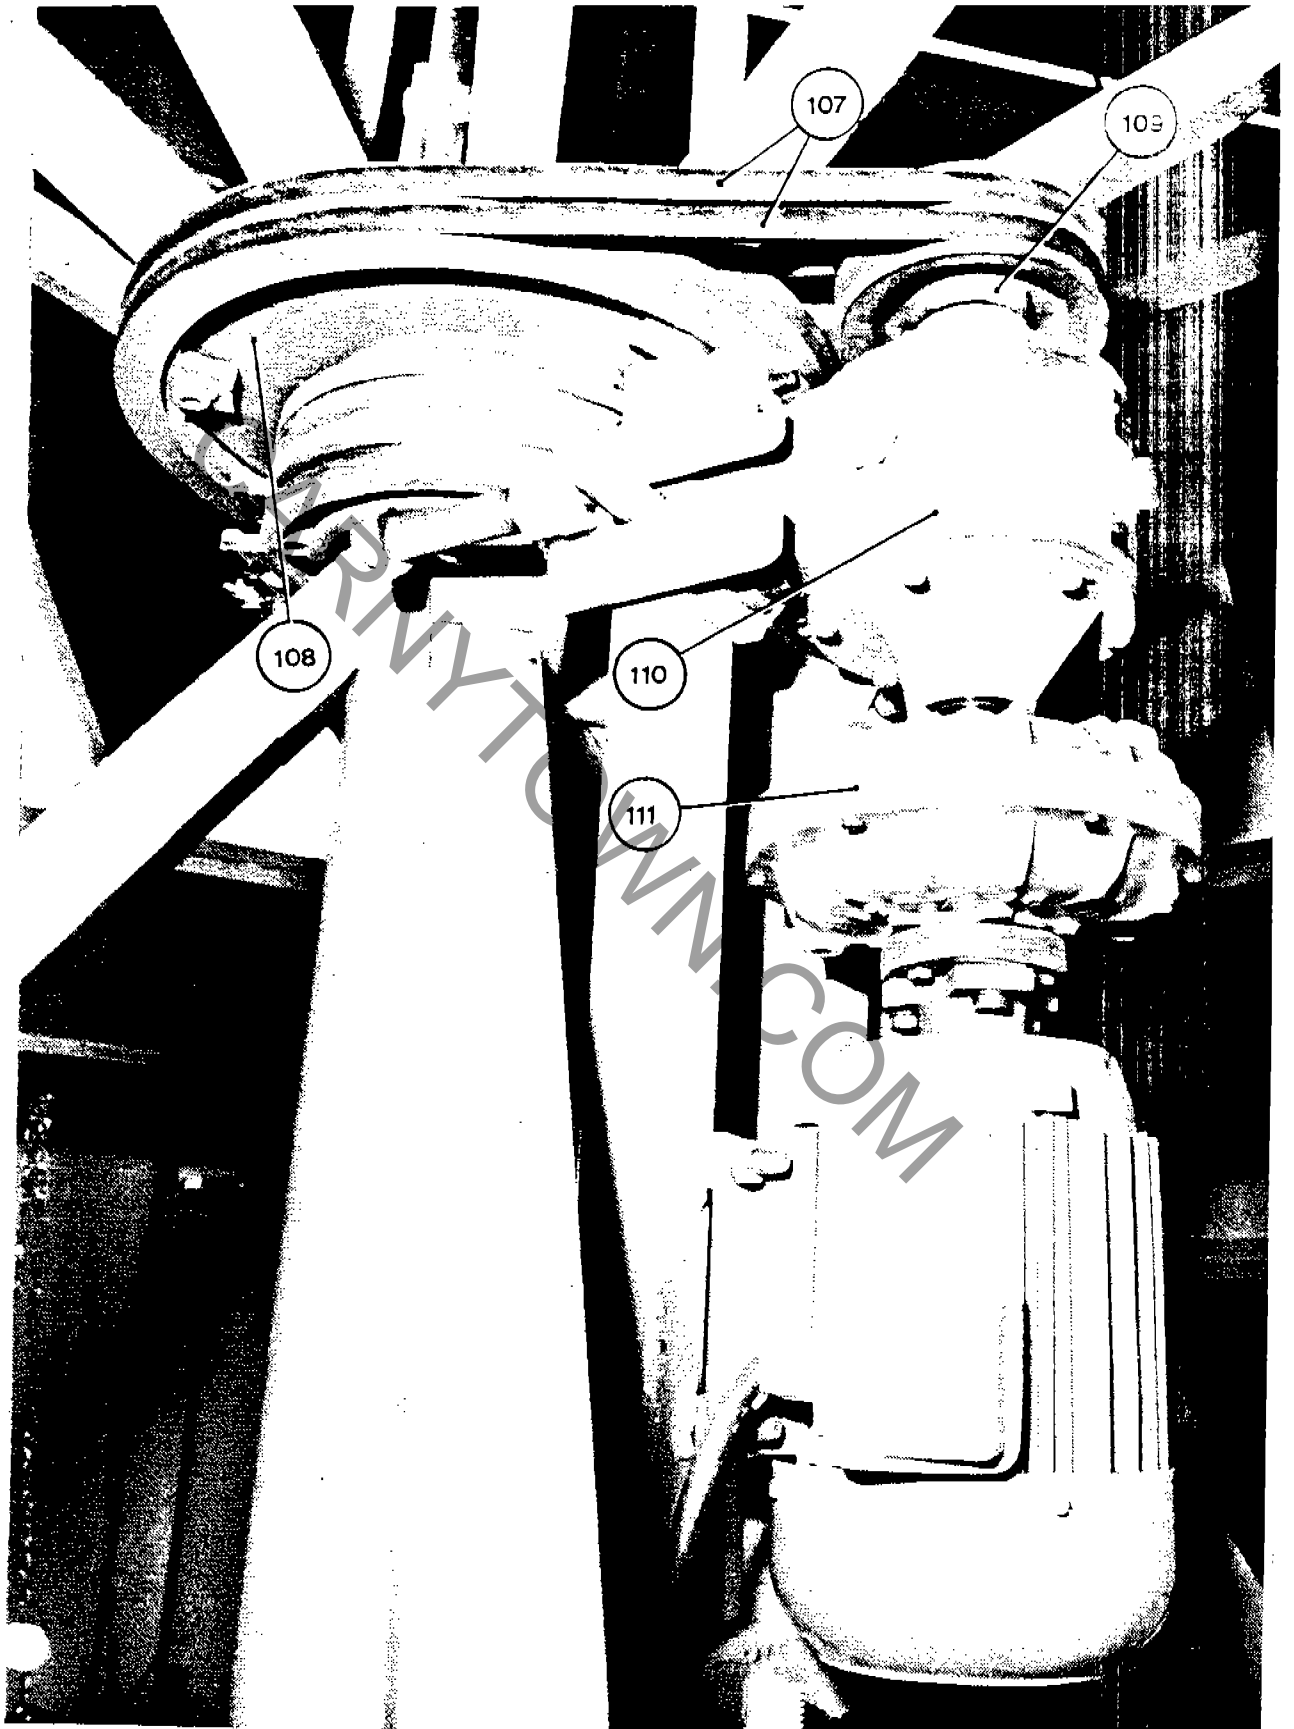

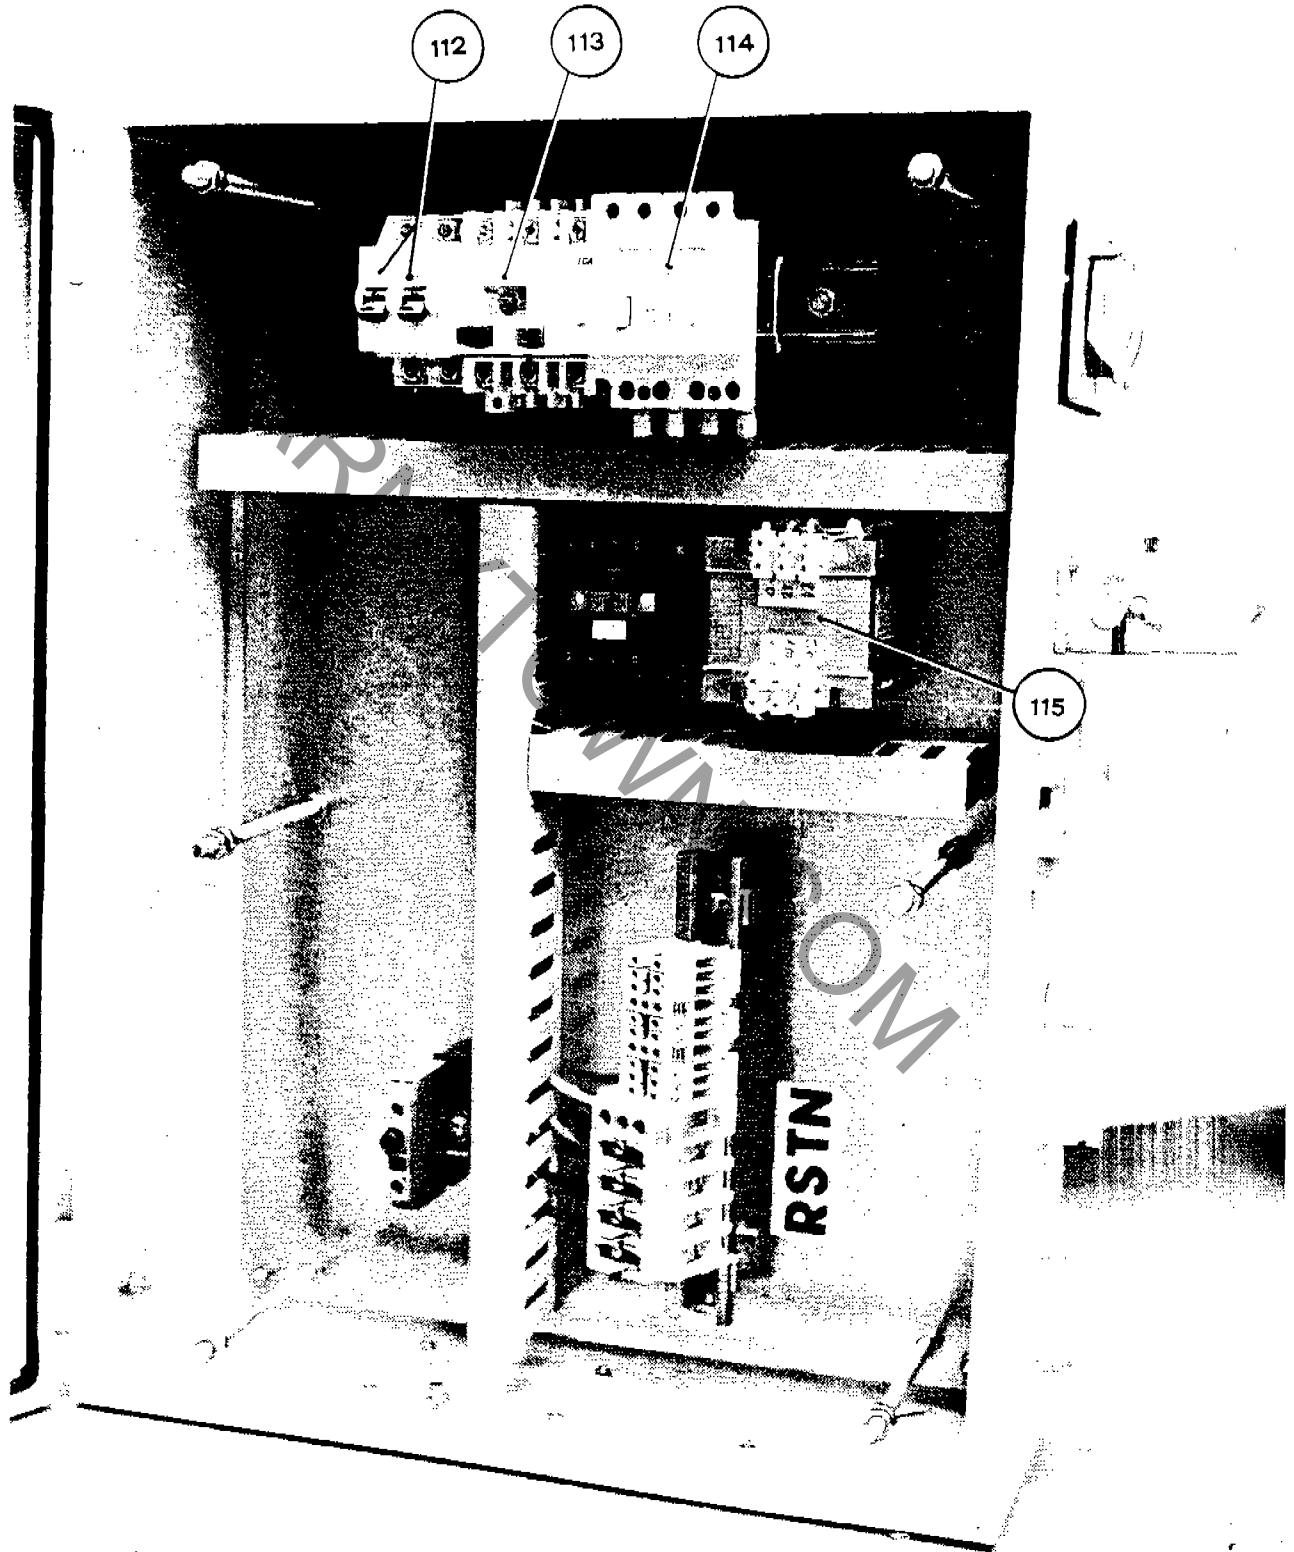

ZANU PERLA

AMUSEMENT RIDE

SET UP INSTRUCTIONS

- 1) Stand-up main column
- 2) Insert 6 base bars on bottom of column - secure them with nuts and bolts or pins and safety clips - level the base.
- 3) Position the 6 platforms on the base bars, hooking them into the base bars brackets.
- 4) Insert the 6 upper trusses on the top of the column, secure them with bolts and nuts or pins and safety clips.
- 5) Slide in the roof fiberglass panels between the trusses.
- 6) Install the canvas on top, securing it on the fiberglass panels and extremity of trusses.
- 7) Install the light strips at the base, securing them with safety clips, and on the top; plug them in.
- 8) Run the power cable and the control cable underneath the platform, plug power cord in a 110V outlet.
- 9) Install fences around the ride (18' circle)
- Ø) Hook the double hooks ("S" hooks) onto the ring welded at the extremity of the trusses.
- 1) Hook the center of the chains equalizers to the "S" hooks.
- 2) Check the chains and the safety bars.
- 3) Test the ride.

MAINTENANCE

Drive unit: see enclosed Manufacturer Manual.
Check tension of the drive belts before set up or once a month, replace worn out belts.

INSPECTION

Daily before start of operations:
Check bolts, pins, safety pins
Check visually the chains
Check the safety bar
Check crotch strap or safety belt

Every set-up or weekly:
Check visually weldings of rings on trusses.